
Specifications CL36D




Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.

CL36D Woodburning Fireplace

MODEL	HEIGHT		FRONT WIDTH		BACK WIDTH		DEPTH		VIEWING AREA
CL36D	Actual	Framing	Actual	Framing	Actual	Framing	Actual	Framing	34 x 22-1/2
	42-1/4	42-1/4	36-5/8	37-1/8	36-5/8	37-1/8	22-1/2	23	

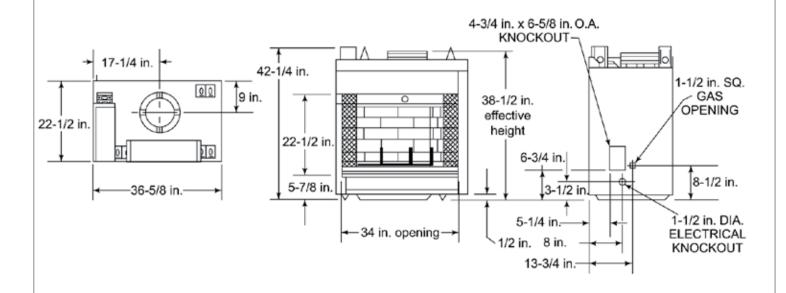

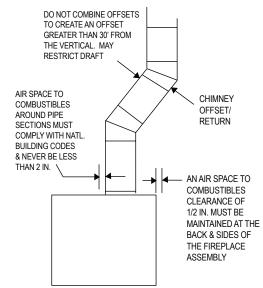

GUIDELINES FOR THE CHIMNEY DESIGN & CONSTRUCTION

WARNING!! Fire Risk.

Consult installation manual for installation clearances and details.

- Minimum total straight height = 14 ft. (4.3m).
- Minimum height with an offset/return combination = 14.5 ft. (4.4m).
- Maximum height = 50 ft. (15.2m).
- Maximum chimney length between an offset and return = 20 ft. (6.1m).
- Maximum distance between chimney stabilizers = 35 ft. (10.6m).
- Double offset/return minimum height = 20 ft. (6.1m).
- Never draw combustion air from a wall, floor, or ceiling cavity or from any enclosed space such as a garage.
- Maximum number of offset and return pairs is two.
- To reduce the effects of negative pressure, installation of an outside air kit is highly recommended.


DISCLAIMER: This information is intended for reference only, and is subject to change without notice. Refer to www. fireplaces.com to view the installation manual for detailed information, or work with a fireplace dealer when planning and installing this unit.


Additional information can be found online at www.heatilator.com

www.fireplaces.com


Specifications CL36D

FIREPLACE LOCATIONS AND DIMENSIONS

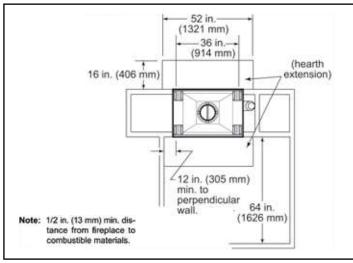


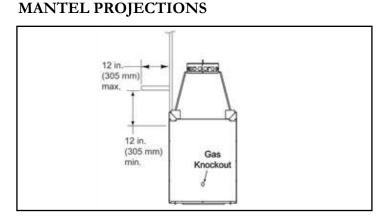

HEARTH EXTENSIONS

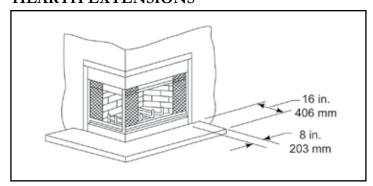


CHASE CONSTRUCTION

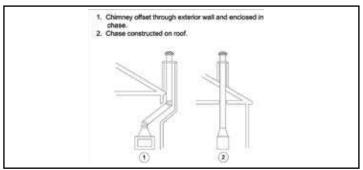


meatilator

A brand of Hearth & Home Technologies, Inc. Lakeville, MN Phone: (800) 927-6841 Web: www.heatilator.com

FRAMING

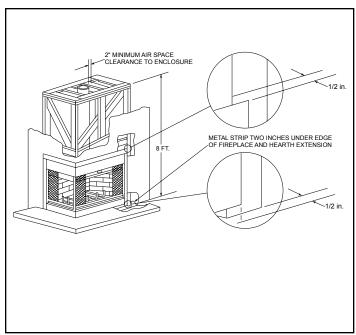

CLEARANCE TO COMBUSTIBLES

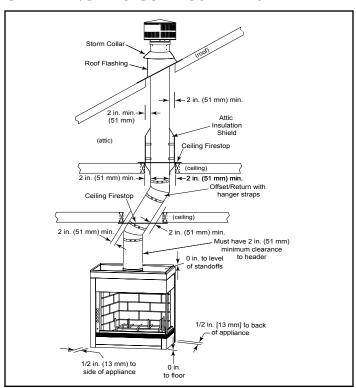



Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatilator.com



