


DIRECT VENT KITS


LINK-DV30B, LINK-DV4-30B

- Installation Instructions -

LINK-DV30B INSTALLATION

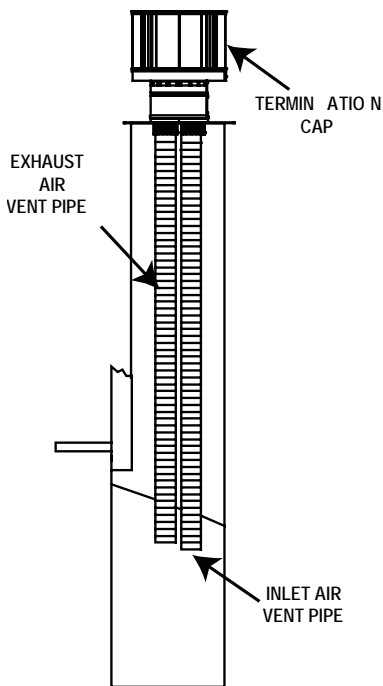


LINK-DV4-30B INSTALLATION

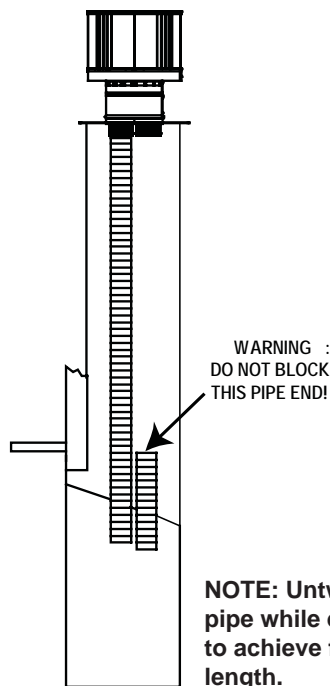

NOTE: Untwist the pipe while extending it to achieve full 30 foot length.

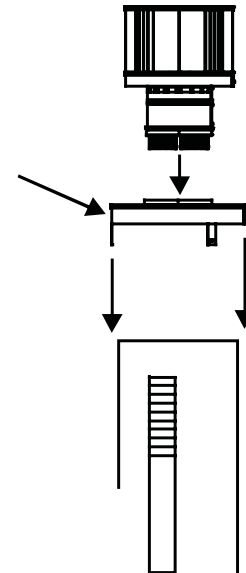

OPTIONAL
LINK-ZC-ADPB
FOR USE
WITH CLASS A
WOODBURNING
PIPE.



Remove 18 in. x 18 in. flashing on cap by removing 3 screws. Connect both the LINK-ZC-ADPB to Class A Pipe and the termination cap to the LINK-ZC-ADPB with the self tapping screws provided.

CAUTION! Risk of Cuts or Abrasions! Wear protective gloves and safety glasses during installation. Sheet metal edges are sharp.

EXH is etched in front of the exhaust collar on the unit. The exhaust collar is labeled on the cap. If label is damaged or removed, the exhaust collar is the one that extends farther through the cap when looking at the cap from the bottom.

| | |
|---|-----------------------|
|  | WARNING |
|  | Explosion Risk. |
| | Combustion Fume Risk. |
| <ul style="list-style-type: none"> • Connect vent sections per installation instructions. • Connect exhaust vent pipe ONLY to exhaust starting collar and termination cap center collar. • Connect inlet air vent ONLY to inlet air collar on appliance and either the termination cap inlet air collar OR terminate within chimney. | |

NOTE: Use 3 of the self tapping screws for each collar to attach flex liner.

To help eliminate cold air drafts, it may be necessary to place non-combustible insulation around the flues as they go through the damper.

Insulation is **REQUIRED** for the LINK-DV4-30B system.

Please contact your Hearth & Home Technologies dealer with any questions or concerns.

For the location of your nearest Hearth & Home Technologies dealer, please visit www.fireside.com.

Hearth & Home Technologies Inc.
7571 215th Street West, Lakeville, MN 55044
www.fireside.com