




Please consult the manufacturer's installation manual for all details and requirements before making a final design layout decision.


GBFL4136I

Multi-Sided Gas Fireplace

| MODEL | HEIGHT | | FRONT WIDTH | | BACK WIDTH | | DEPTH | | VIEWING AREA |
|-----------|--------|---------|-------------|---------|------------|---------|--------|---------|--------------|
| | Actual | Framing | Actual | Framing | Actual | Framing | Actual | Framing | |
| GBFL4136I | 38 | 38-1/2 | 40-1/2 | 41 | 40-1/2 | 41 | 24 | 23 | 36 x 24-1/8 |

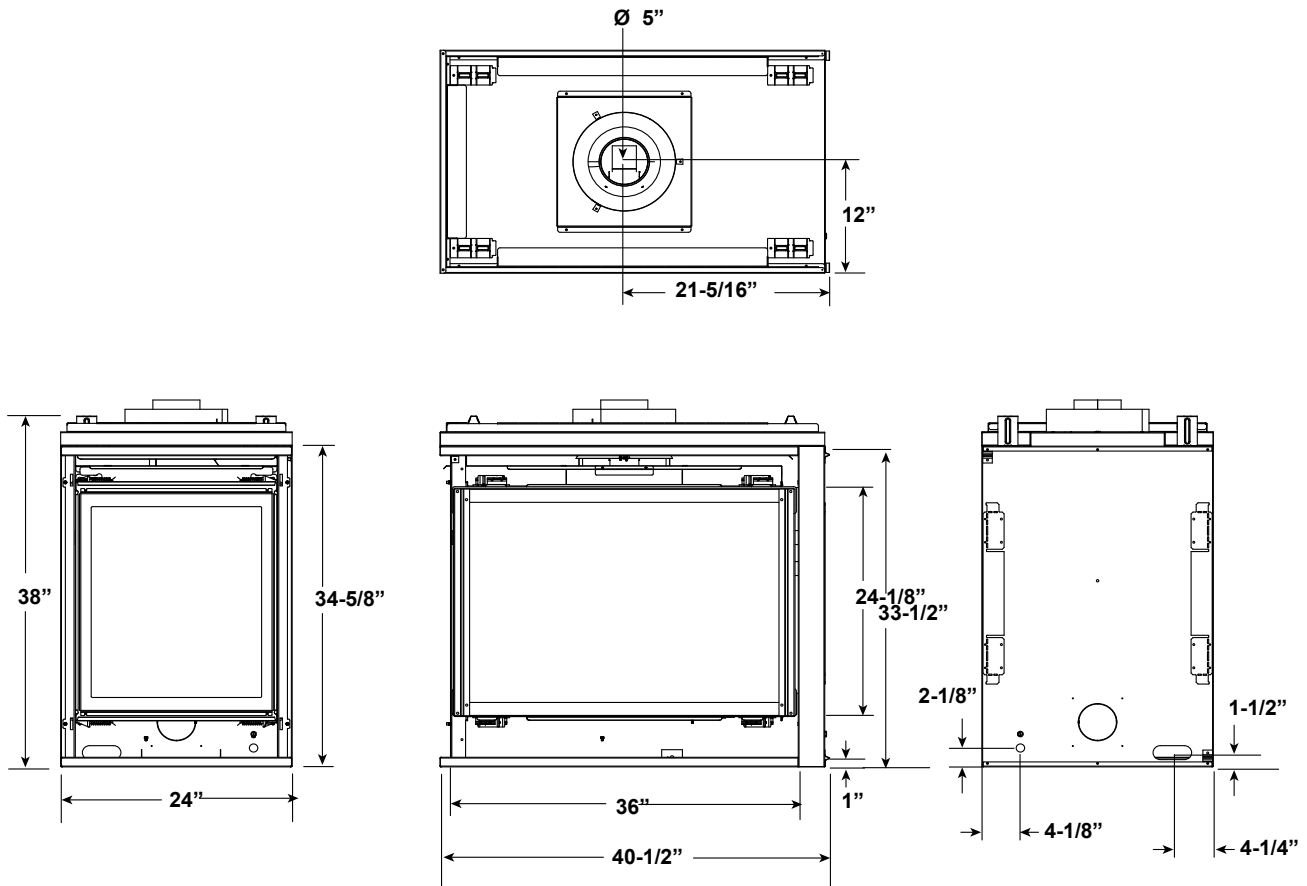


GUIDELINES FOR VERTICAL VENTING WITH A TWO-ELBOW CONFIGURATION

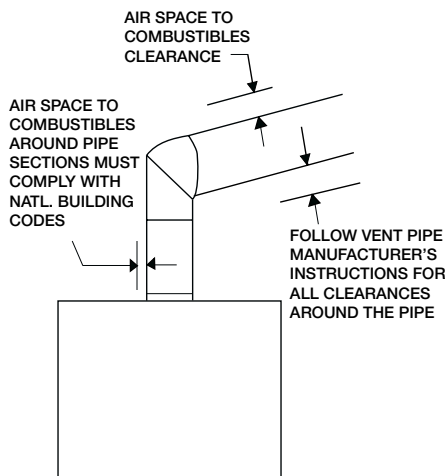

WARNING!! Fire Risk.

Consult installation manual for installation clearances and details.

- Maximum vertical (V1) = 60 ft. (18.3 m) from base of application to termination.
- Minimum vertical vent = 12 ft. (3.7 m) from base of application to termination.
- Vertical (V1) to horizontal (H1) ratio = 2:1 every 2 ft. of V1 allows 1 ft. maximum of H1.
- Maximum length of horizontal (H1) is 50% of (V1) & cannot be more than 30 ft. (9.2 m).
- This product must terminate vertically.
- Use B-vent pipe coupled with an attic shield.
- Maintain 1/2 in. (13 mm) minimum clearance to combustibles from the back and sides of the fireplace.

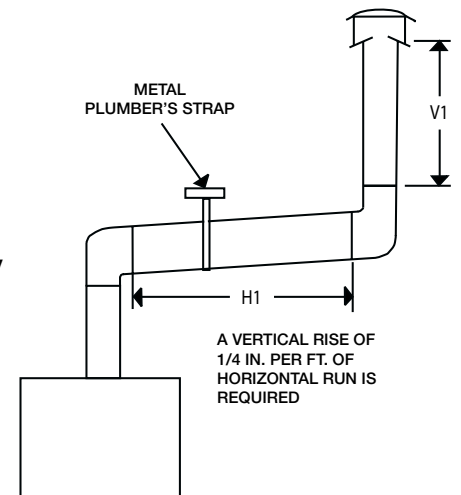


DISCLAIMER: This information is intended for reference only, and is subject to change without notice. Refer to www.heatilator.com to view the installation manual for detailed information, or work with a fireplace dealer when planning and installing this unit.

FIREPLACE FRAMING AND APPLIANCE CLEARANCES


| GBFL4236I | A | B | C* | D | E | F | G | H | I |
|-----------|---------------------------|------------------------|-----------------------|-----------------------|----------------------|-------------------|----------------------|-------------------|--------------------|
| | Rough Opening (Vent Pipe) | Rough Opening (Height) | Rough Opening (Depth) | Rough Opening (Width) | Clearance to Ceiling | Combustible Floor | Combustible Flooring | Ends of Appliance | Sides of Appliance |
| Inches | ** | 38-1/2 | 23 | 41 | 31-5/8 | 0 | 0 | 1/2 | 36 |

*Adjust framing dimensions for interior sheathing (such as sheetrock)
**See pipe manufacturer's installation instructions


MANTEL PROJECTIONS

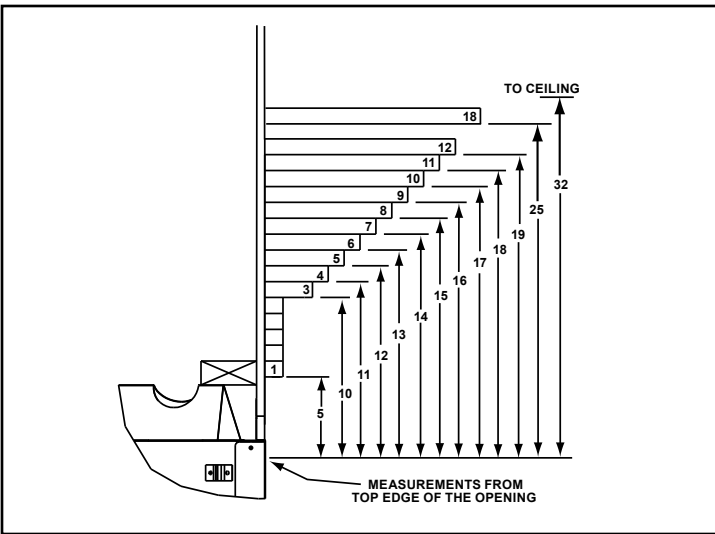

FIREPLACE LOCATIONS

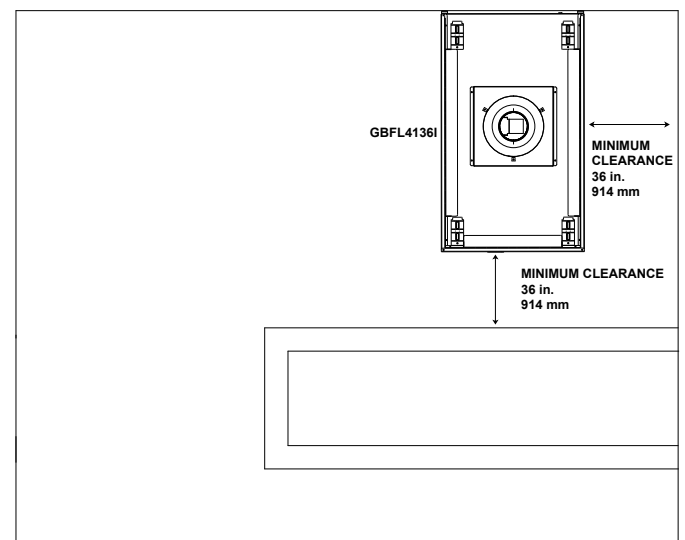

CLEARANCE TO PERPENDICULAR WALLS

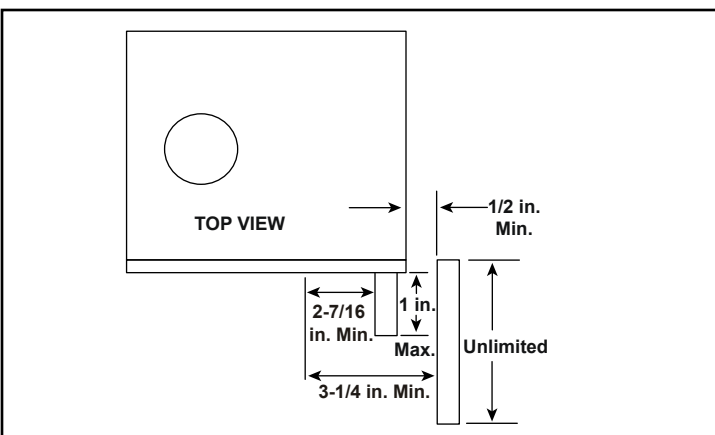

| PRODUCT LISTING CODES | |
|-----------------------|------------------|
| US | ANSI Z21.88-2002 |
| CAN | CGA 2.2 |
| | UL307B |

Product information provided is not complete and is subject to change without notice. Product installation must adhere strictly to instructions accompanying product to avoid risk of fire and potential injury.

Additional information can be found online at www.heatilator.com